




- 5.0MP Resolution
- HYBRID: Analog & IP
- Up to 4K Resolution Output
- Control over Coax

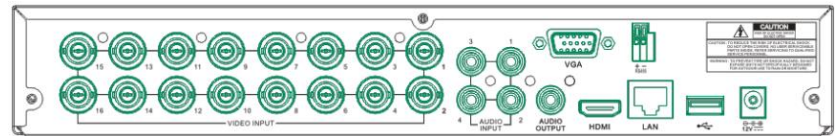

DISPLAY

Resolution	Analog: 5MP (20fps) 4MP/3MP (30fps) 1080P/720P/960H IP: 4MP/3MP/1080P/720P
Feature	1/4/6/8/9/10/13/14/16/17/19/22/2 5/S.E.Q.

RECORD

Resolution	Analog: 5MP/4MP/3MP/1080P/720P/960 IP: 3MP/1080P/720P/960H
Speed	Analog: 5MP 11fps (each ch) 4MP: 15fps (each ch) 3MP: 12fps (each ch) 1080P: PAL:15fps (each ch) NTSC:30fps (each ch) 720P: PAL:25fps (each ch) NTSC:25fps (each ch) 960H: PAL:25fps (each ch) NTSC:30fps (each ch) IP: PAL: 25fps (each ch) NTSC: 30fps (each ch)

SPECIFICATIONS

Video Compression	H.264
Video System	NTSC/PAL
Operating System	Linux (embedded)
Analog video input/output	16CH input / VGA & HDMI output
IP Video Input	Up to 8 CH
Composite Video Input	Up to 16 CH
Audio Input / Output	4CH inputs / 1 CH output (RCA)
IP-Recording Bandwidth	64Mbps~ 96Mbps
Max. Output Bandwidth	128Mbps
Max. Decode Performance	5MP: 176fps 4MP: 240fps 1080P: 480fps
Recording Mode	Continuous/Manual/Motion detect
Synchronous Playback	16 CH
Network Type	TCP/IP, P2P, 1 SATA HDD, up to 8TB
HDD Interface	2 x SATA, Up to 8TB per bay
USB	2 x USB (for mouse and backup)
Sensor & Alarm I/O	No
PTZ Control	Yes (RS485) Control over Coax
Mobile Surveillance	Supports mobile phones: iPhone/Android
VGA/HDMI Output	1280*1024, 1440*900, 1280*720, 1920*1080, 1680*1050, 1600*1200, 1920*1200, 2560*1440, 3840*2160
Power Supply	DC12V/2A
Dimensional	300 x 227 x 53mm
Working Temperature	-10°C~+55°C
Working Humidity	10%~90%