


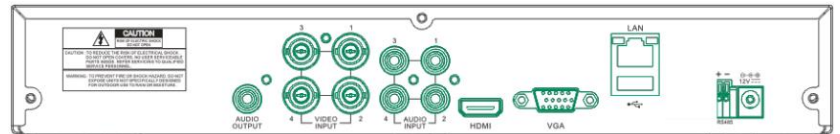

- 4 channel DVR
- **HYBRID**: Analog & IP
- Up to **4K** Resolution Output
- Accepts H.265 Cameras
- Control over Coax


DISPLAY

Resolution	Up to 4K output
Feature	1/4/6 S.E.Q.

RECORD

Resolution	Analog: 3MP/1080P/720P/960H IP: 3MP/1080P/720P/960H
Speed	High Definition: 3MP: 12fps (each ch) 1080P: 15fps (each ch) 720P: PAL: 25fps (each ch) NTSC: 30fps (each ch) 960H: PAL: 25fps (each ch) NTSC: 30fps (each ch) IP: 2MP: 30 fps (each ch) 3MP: 20 fps (each ch)

Video Compression	H.264
Video System	NTSC/PAL
Operating System	Linux (embedded)
Analog video input/output	4CH inputs/VGA & HDMI output
IP Video Input	2CH (only IP up to 6ch)
Composite Video Input	Up to 6 CH (Analog video & IP video)
Audio Input/Output	4CH inputs / 1 CH output (RCA)
IP-Recording Bandwidth	8 Mbps~ 24Mbps(default is 8Mbps, decrease one Analog channel can increase 4Mbps)
Max. Output Bandwidth	32Mbps
Max. Decode Performance	1080P: 2 CH Real-Time
Recording Mode	Continuous/Manual/Motion detect
Synchronous Playback	4 CH
Network Type	Lan, DHCP, and DDNS
HDD Interface	1 SATA HDD, up to 6TB
Multiplex Operation	Live display, record, playback, backup, and network
USB	2 x USB (for mouse and backup)
Sensor & Alarm I/O	No
PTZ Control	Yes (RS485)
Mobile Surveillance	Supports mobile phones: iPhone/Android
VGA/HDMI	1024*768, 1280*1024, 1440*900, 1920*1080
Power Supply	DC12V/2A
Dimensional	300 x 227 x 53mm
Working Temperature	-10°C~+55°C
Working Humidity	10%~90%